

clearview



CLV-GH



CLV-LH



CLV-LP



CLV-MH-C



CLV-PH



CLV-RBR



CLV-RH

SLIDE AND FOLD - CLEARVIEW


Specifications

- Glass Thickness: 8 - 10mm
- Max Door Height: 8mm Glass: 2.4m
10mm Glass: 3m
- Third Hinges required at 2.4m high
- Top Hung rollers
- Floor Track Options: Recessed U-Channel
Step Down Track
- Finish: Tracks: Mill
Hardware: Natural, Charcoal, Bronze & Black Powder Coat
- Material: Aluminium
- Max recommended leaves stacked to one side: 7
- Leading door can operate independently
- Slide bolt locking mechanism
- Not intended to be used for primary barrier
- Weather resistant but not weather proof

COMPONENTS




SHOP DRAWINGS

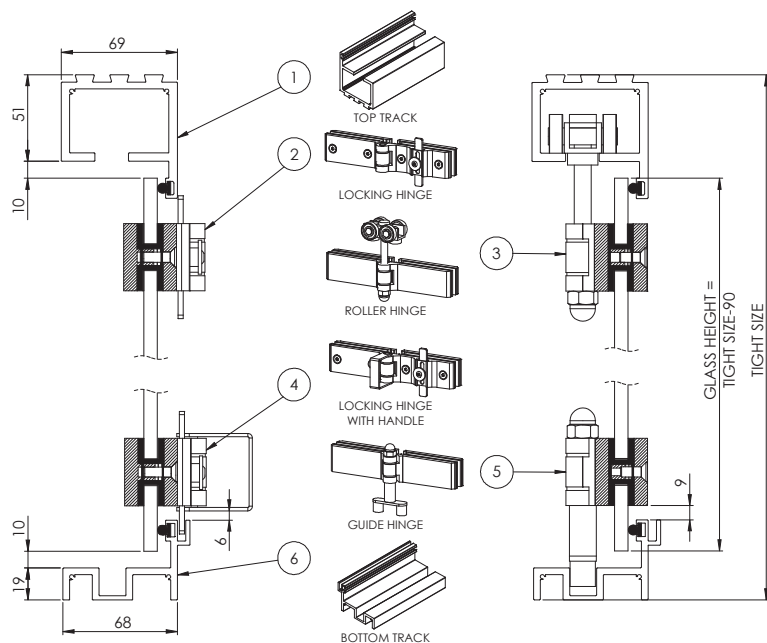


FOLDING OPTIONS

Single Stack



Double Stack

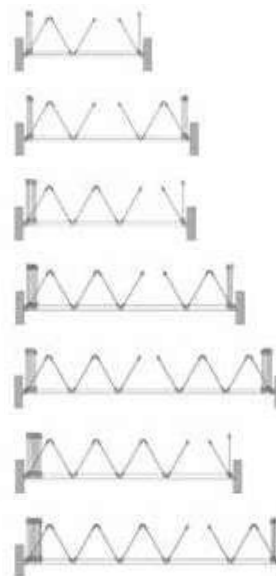

OVERVIEW

