

patch fittings



PATCH FITTINGS

BOTTOM CORNER PATCH

Code: SP10

DESCRIPTION



With Bottom Insert for Double Action for Floor Spring Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black



TOP CORNER PATCH

Code: SP20

DESCRIPTION



With plastic bushing for Ø15mm pin Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black Plated



LEVER LOCK HANDLE WITH KEY AND THUMB TURN

Code: SP21L

DESCRIPTION

Latch Bolt

Euro Cyclinder Pin with 3 keys & Thumb turn



Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed or Polished

Includes Striker Plate



KEEP FOR LEVER LOCK HANDLE WITH KEY AND THUMB TURN

Code: SP21B

DESCRIPTION

Works in Conjunction With SP21L



Lock Throw Reciever

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed or Polished





FREE PIVOT BEARING**Code: SP23****DESCRIPTION**

Internal Free Pivoting Thrust Bearing

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

**TOP PIVOT PIN****Code: SP24****DESCRIPTION**

With Ø15mm pin


Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed or Polished

**OVERPANEL PATCH WITH PIN****Code: SP30****DESCRIPTION**

With Ø15mm pin and wall plate



Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

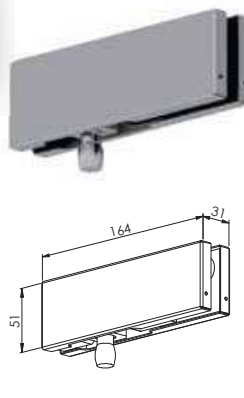**ANGLED OVERPANEL PATCH WITH PIN****Code: SP40****DESCRIPTION**

With Ø15mm pin



Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

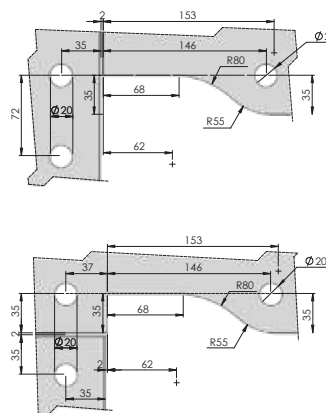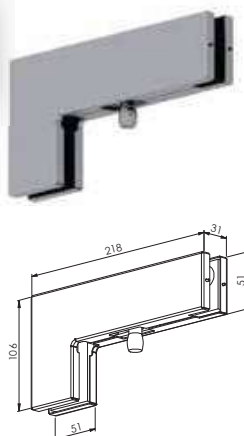

ANGLED OVERPANEL PATCH WITH FIN CONNECTOR AND PIN LEFT HANDED**Code: SP41L****DESCRIPTION**

With Ø15mm pin


Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

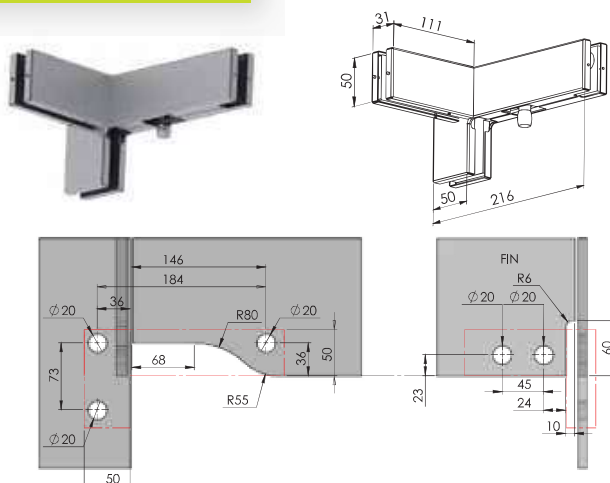**ANGLED OVERPANEL PATCH WITH FIN CONNECTOR AND PIN RIGHT HANDED****Code: SP41R****DESCRIPTION**

With Ø15mm pin


Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

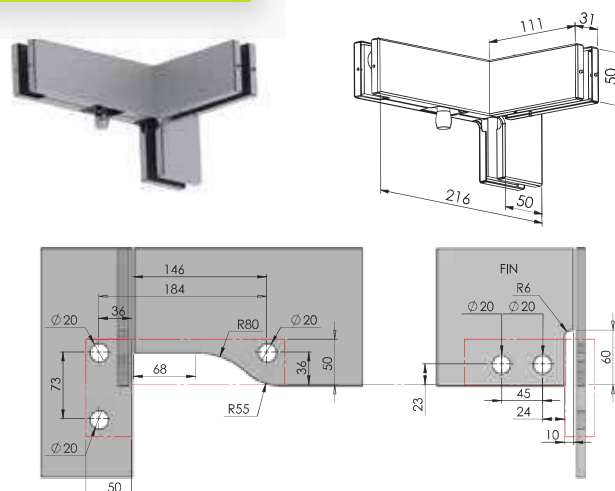**BOTTOM CORNER LOCK****Code: SP50****DESCRIPTION**

Semi-Round Single-Throw Bolt Ø15mm

Euro Cylinder Pin with 3 Keys


Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

Includes Striker Plate

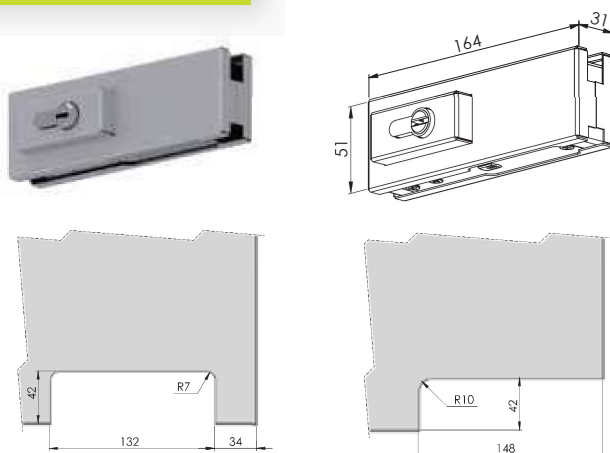

OPTION 1: CUTOUT OFFSET

OPTION 2: CUTOUT ON EDGE

CENTRE PATCH LOCK**Code: SP52****DESCRIPTION**

Rectangular Single-Throw Bolt

Euro Cylinder Pin with 3 Keys


Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

Includes Striker Plate

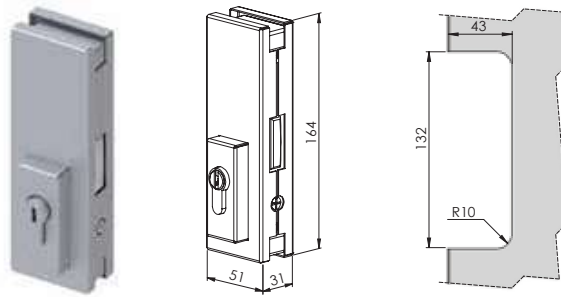**CENTRE PATCH KEEP****Code: SP53****DESCRIPTION**

Works in Conjunction With SP52


Lock Throw Receiver

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

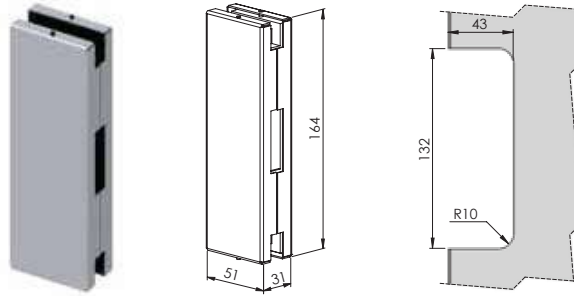**SQUARE BOTTOM LOCK****Code: SP55****DESCRIPTION**

Semi-Round Single-Throw Bolt Ø15mm


Euro Cylinder Pin with 3 Keys

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium

Cover Plate Material: S/S 304

Available in: Brushed, Polished or Matte Black

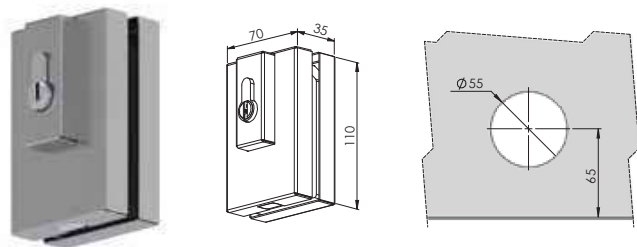**DOUBLE ACTION SUNKEN FLOOR SPRING****Code: SP540****DESCRIPTION**

Door Max Opening Angle: 130°

Closing Speed (1): 90° - 25°

Latching Speed (2): 25° - 0°


Hold Open: 90°

Maximum Door Weight: 100kg

Maximum Door Width: 1000mm

Includes Cement Box

Available In: Brushed, Polished or Matte Black

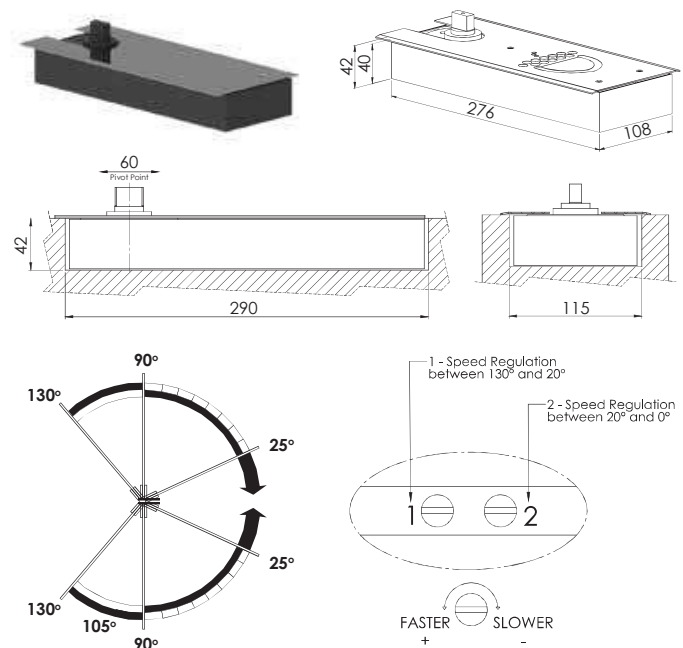

DOUBLE ACTION SUNKEN FLOOR SPRING**Code: SP550****DESCRIPTION**

Door Max Opening Angle: 130°

Closing Speed (1): 90° - 25°


Latching Speed (2): 25° - 0°

Hold Open: 90°

Maximum Door Weight: 150kg

Maximum Door Width: 1250mm

Includes Cement Box

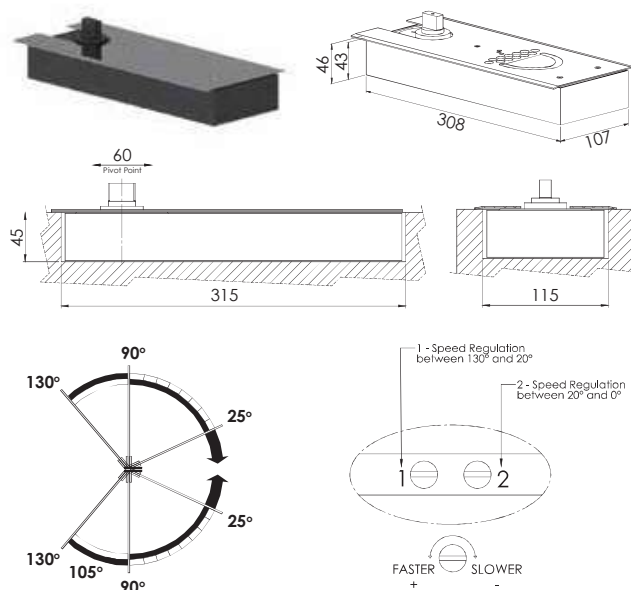Available In: Brushed, Polished or
Matte Black**DOUBLE ACTION SUNKEN FLOOR SPRING****Code: SP560****DESCRIPTION**

Door Max Opening Angle: 105°

Closing Speed (1): 90° - 25°

Latching Speed (2): 25° - 0°


Hold Open: 90°

Maximum Door Weight: 80kg

Maximum Door Width: 900mm

Includes Cement Box

Available In: Brushed

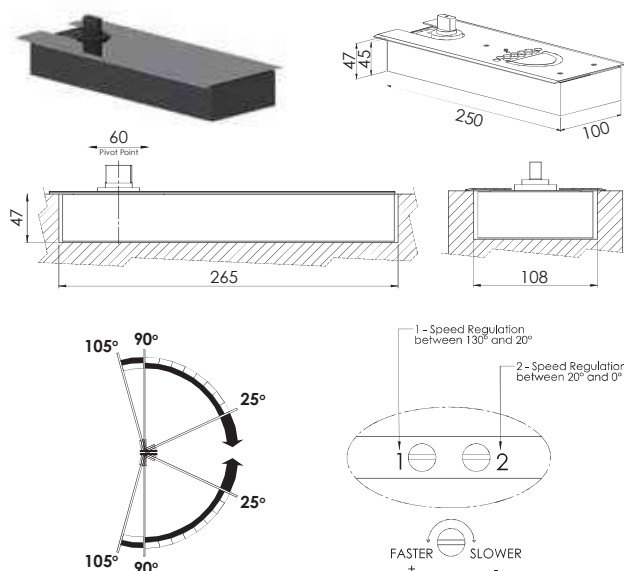**DOUBLE ACTION SUNKEN FLOOR SPRING****Code: SP584****DESCRIPTION**

Door Max Opening Angle: 105°

Closing Speed (1): 90° - 25°

Latching Speed (2): 25° - 0°


Hold Open: 90°

Maximum Door Weight: 120kg

Maximum Door Width: 1100mm

Includes Cement Box

Available In: Brushed

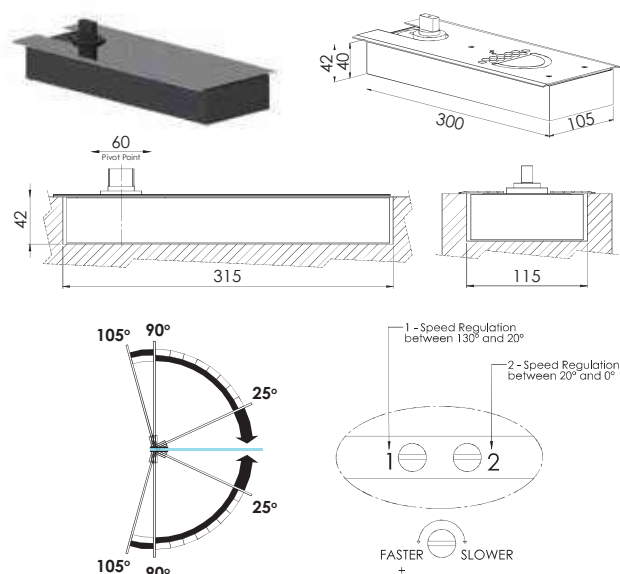

DOUBLE ACTION SUNKEN FLOOR SPRING

Code: SP800

DESCRIPTION:

Door Max Opening Angle: 130°

Closing Speed (1): 90° - 25°

Latching Speed (2): 25° - 0°


Hold Open: 90°

Maximum Door Weight: 300kg

Maximum Door Width: 1500mm

Includes Cement Box

Available In: Brushed, Polished or
Matte Black

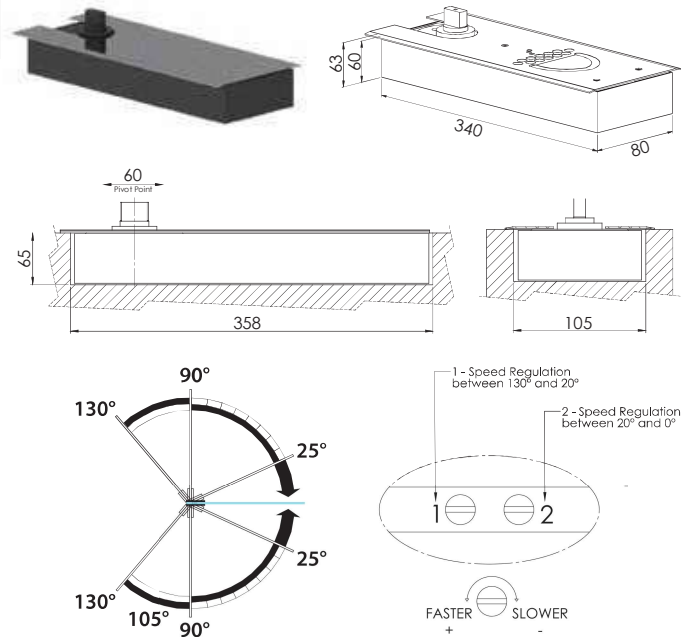

CONCEALED FLOOR SPRING ABOVE THE GROUND

Code: SP610

DESCRIPTION

Door Opening Angle Maximum: 105°

Closing Speed: 90° - 25°


Latching Speed: 25° - 0°

Maximum Door Weight: 100kg

Maximum Door Width: 1000mm

Glass thickness: 8, 10 and 12mm

Available in: Brushed, Polished or
Matte Black

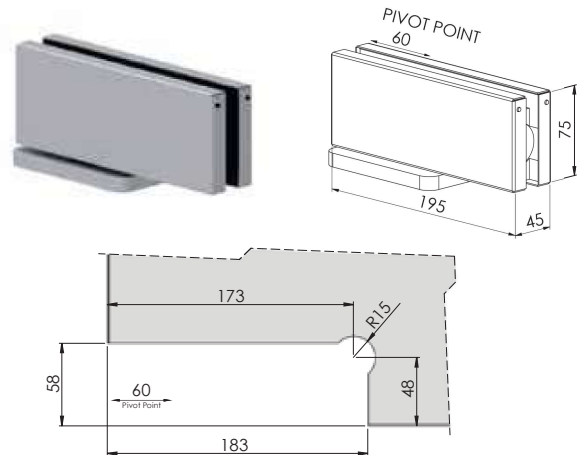

TOP CORNER PATCH

Code: SP620

DESCRIPTION

With plastic bushing for Ø15mm pin


Adjustable Pivot (55/65mm)

Glass thickness: 8, 10, 12 and 15mm

Internal Body Material: Aluminium



Cover Plate Material: S/S 304

Available in: Brushed, Polished or
Matte Black


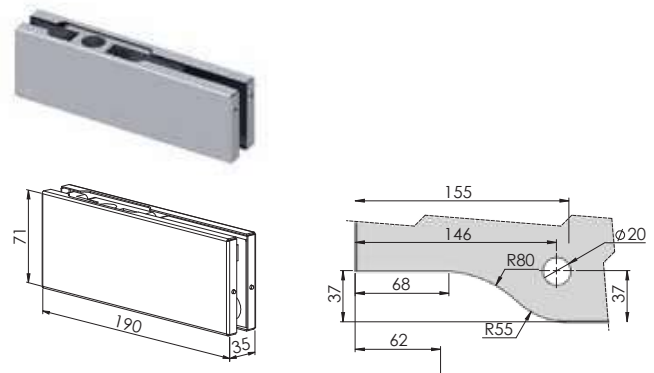


180° GLASS TO GLASS CONNECTOR**Code: SP72****DESCRIPTION**



Glass thickness: 8, 10, 12 and 15mm
 Internal Body Material: Aluminium
 Cover Plate Material: S/S 304
 Available in: Brushed, Polished or Matte Black

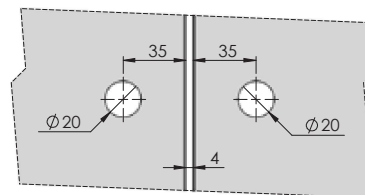**4 PANEL CONNECTOR OF GLASS****Code: SP80****DESCRIPTION**



Glass thickness: 8, 10, 12 and 15mm
 Internal Body Material: Aluminium
 Cover Plate Material: S/S 304
 Available in: Brushed, Polished or Matte Black

**90° GLASS TO WALL CONNECTOR 2 HOLES****Code: SP84****DESCRIPTION**

Glass thickness: 8, 10, 12 and 15mm
 Internal Body Material: Aluminium
 Cover Plate Material: S/S 304
 Available in: Brushed, Polished or Matte Black

**90° WALL TO GLASS CLAMP****Code: SP90****DESCRIPTION**

Glass thickness: 8, 10, 12 and 15mm
 Internal Body Material: Aluminium
 Cover Plate Material: S/S 304
 Available in: Brushed, Polished or Matte Black









90° WALL TO GLASS HYDRAULIC DOOR HINGE (PAIR)

Code: HDH-611-90

DESCRIPTION

Glass thickness: 8, 10 and 12mm
 Material: S/S 316
 Available in: Brushed
 Maximum Door Weight: 60kg
 Maximum Door Width: 1000mm
 Maximum Door Height: 2400mm
 Hold Open: 90°
 Closing Speed: 65° - 35°
 Latching Speed: 35° - 0°



180° GLASS TO GLASS HYDRAULIC DOOR HINGE (PAIR)

Code: HDH-612-180

DESCRIPTION

Glass thickness: 8, 10 and 12mm
 Material: S/S 316
 Available in: Brushed
 Maximum Door Weight: 60kg
 Maximum Door Width: 1000mm
 Maximum Door Height: 2400mm
 Hold Open: 90°
 Closing Speed: 65° - 35°
 Latching Speed: 35° - 0°

