


balustrades

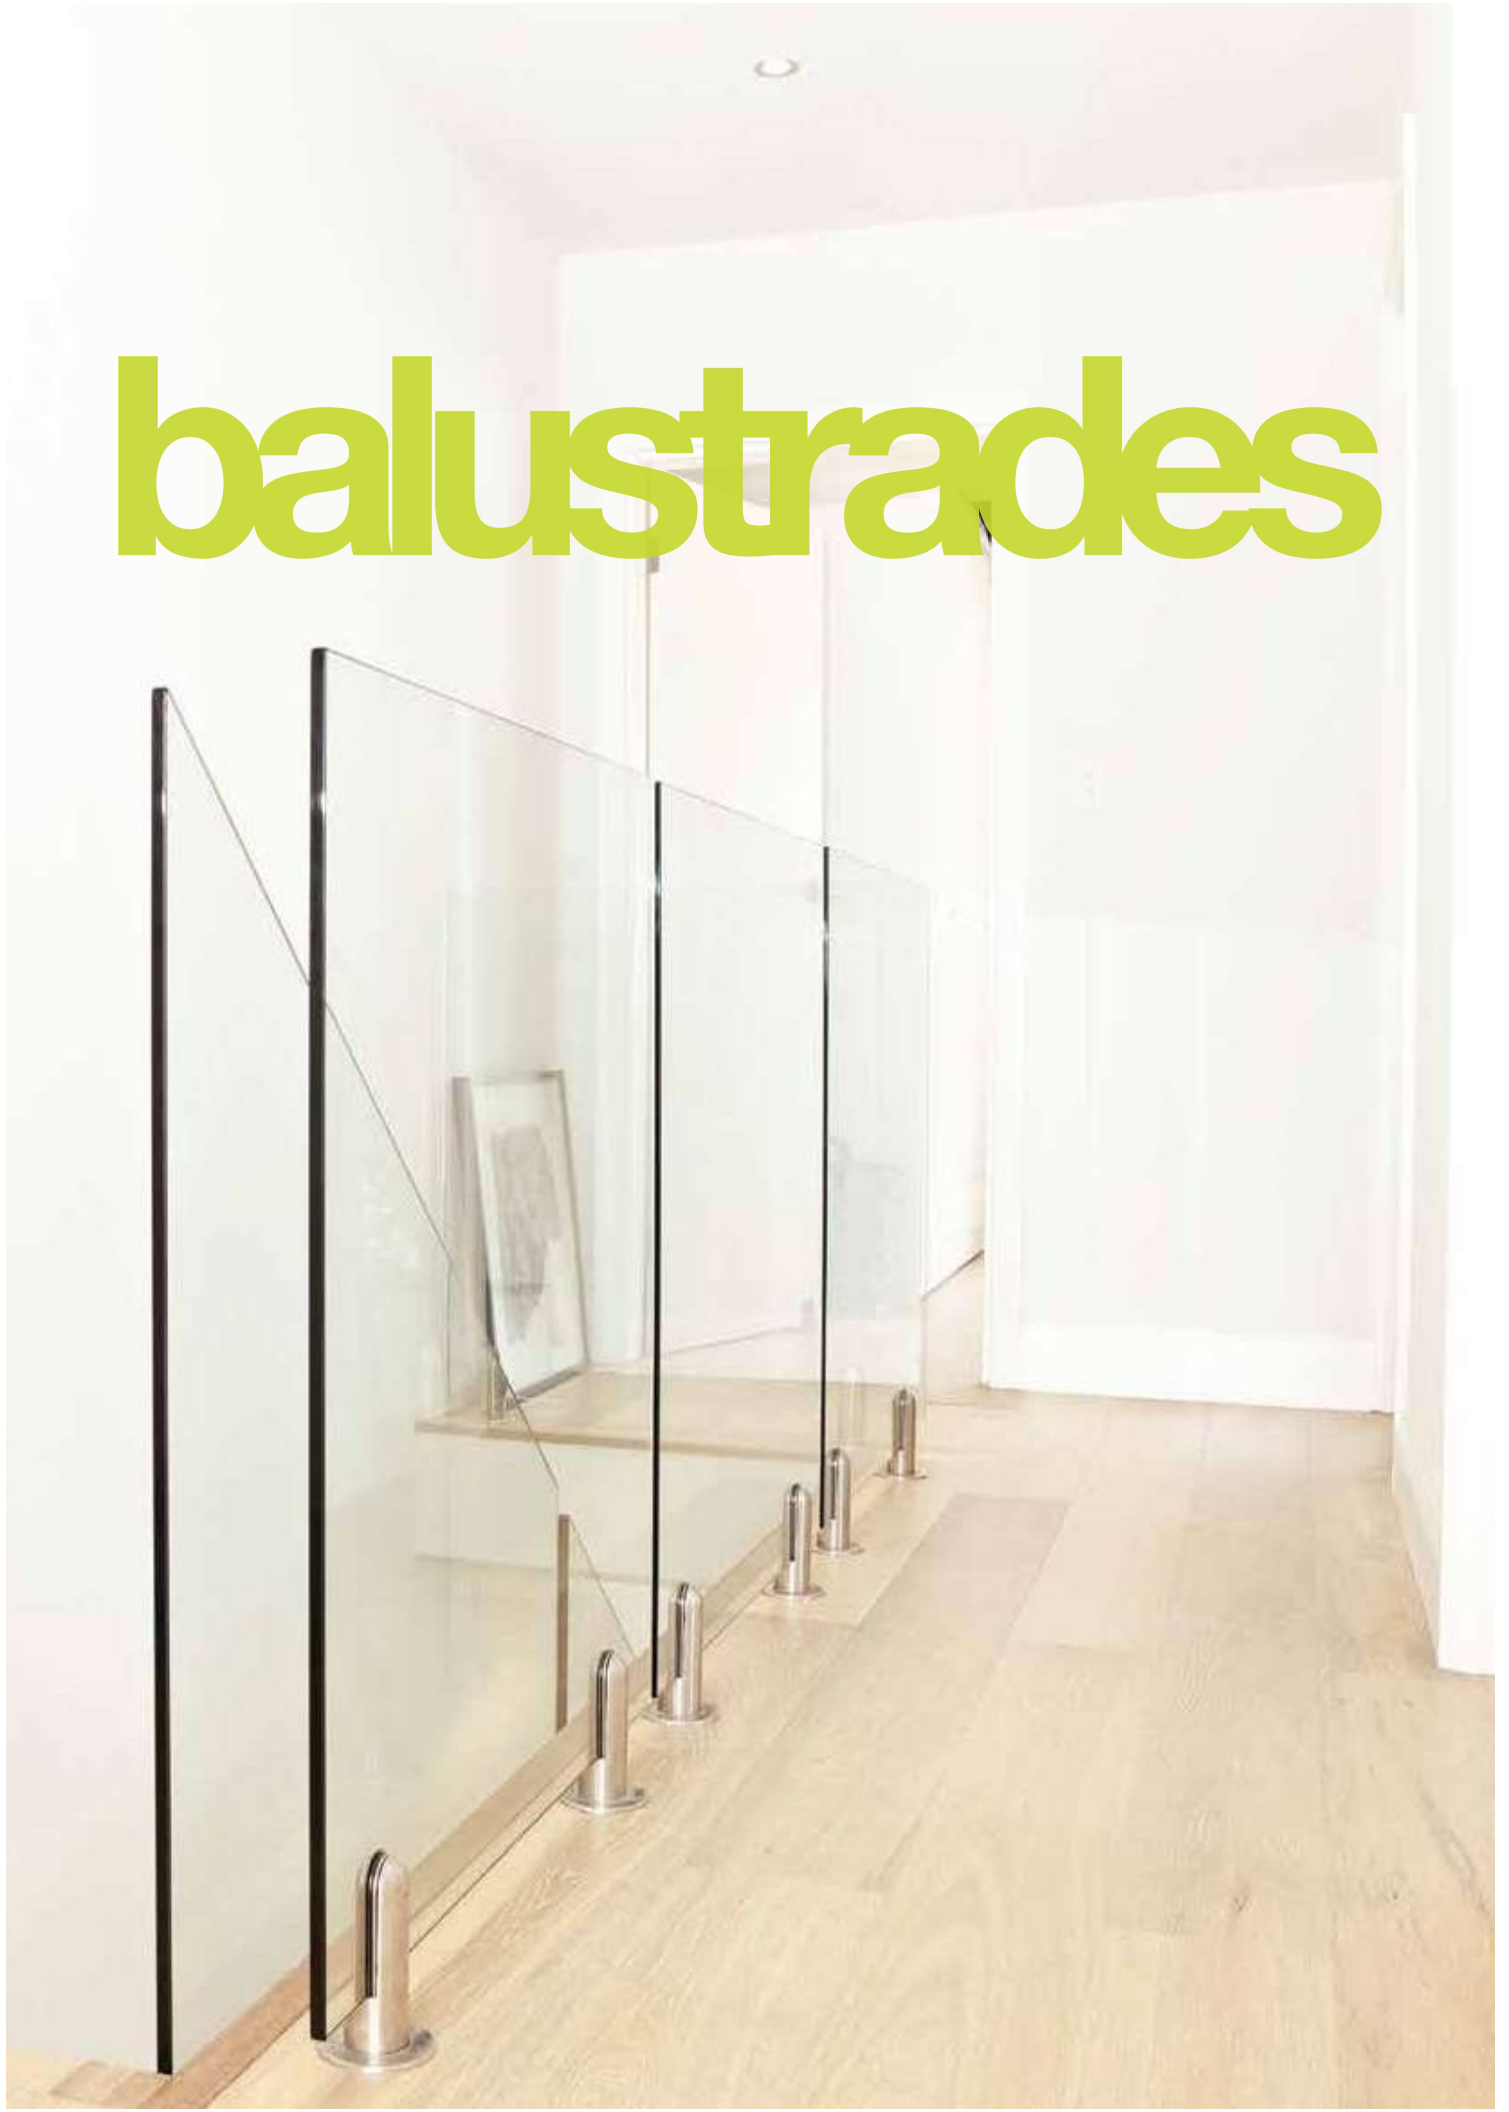

FLOOR MOUNTS

BALUSTRADE CHANNEL - TECHNICAL DETAILS

Code: BUCW-2500N

Balustrade channel designed for residential and commercial use when used with a handrail.



- Supplied in 2500mm length.
- Supplied with predrilled holes and water drainage holes.
- Can be installed on timber, concrete and steel beams.
- Extruded in T6 6063 aluminium.
- Glass Thickness: 12mm glass

Available Finishes


- Natural

What is needed for installation:


- x1 2.5m Channel Length
- x2 Channel Kit
- x1 2.5mm Gasket Length

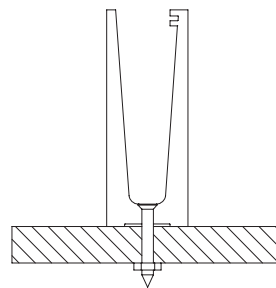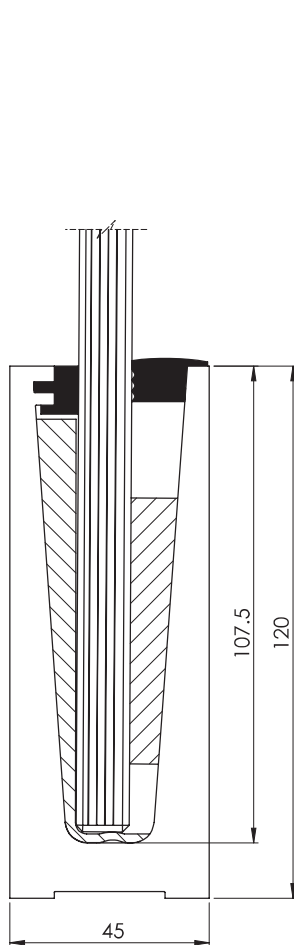

TIMBER MOUNTED

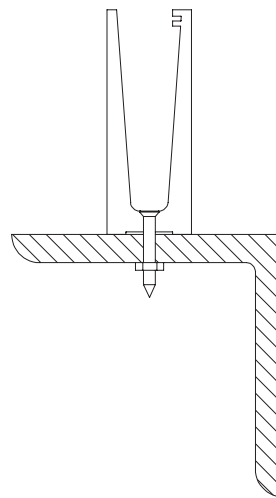

BEAM MOUNTED

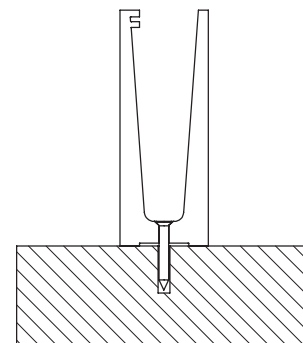

FLOOR MOUNTED

ARTICULATING FLOOR MOUNT SPIGOTS – TECHNICAL DETAILS

Code: BCRS-301A, BCRS-311A, BCRS-381A, BCRS-391A

- Spigot can be fastened to concrete with 12mm Rod and Chemical Anchor.
- Manufactured in Aluminium.
- No holes required in the Glass.
- Glass Thickness: 12mm
- Kits Sold Separately
- The adjustable spigot design allows for 1.5 degrees rotation along the length of the balustrade, this translates to +-30mm of movement forward and back at the top of a 1-meter glass panel.


Available Finishes

- Bright Chrome
- Natural
- Matte Bronze
- Matte Black


Kit Includes

BCRS-KIT

- M12 Stainless Steel Rod
- M12 Stainless Steel Locknut
- M12 Washer

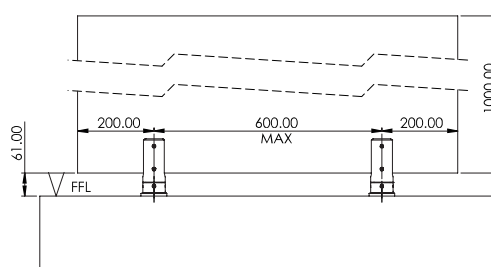

Design Registration Nr: F2023/01196

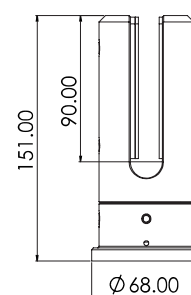

STAINLESS STEEL FLOOR MOUNT SPIGOTS – TECHNICAL DETAILS



Code: BCRS-612

- Spigot can be fastened to concrete with 16mm Rod and Chemical Anchor.
- Manufactured in Stainless Steel 316.
- No holes required in the Glass.
- Glass Thickness: 12mm – 15 mm Glass
- Rods Sold Separately - BCRS-TR16
- Floor Plate Sold Separately - BCRS-612-FP

Available Finishes

- Brushed stainless steel

Recommended Details

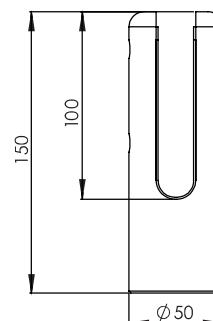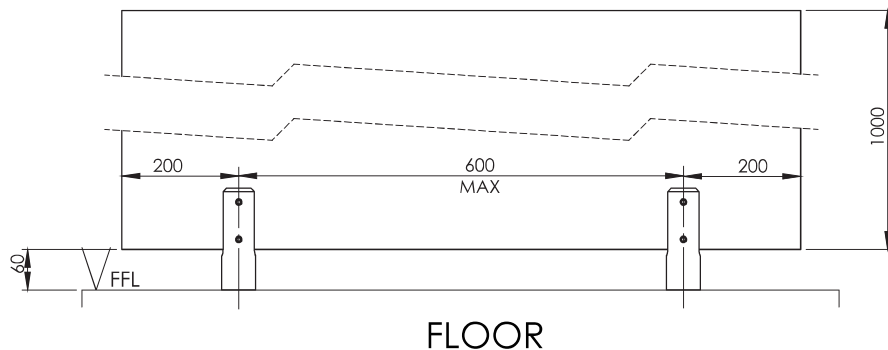

SIDE MOUNTS

FLUSH CAP (44Ø) - TECHNICAL DETAILS

Code : BSR-511-4435





Flush Cap Side Mount

- Side Mounts can be fastened to concrete (12mm rod supplied) with chemical anchor, wood (extra fittings required) or steel beams (extra fittings required).
- As an option a sleeve can be supplied for adjustment of 7mm.
- Manufactured in 304 and 316 stainless steel.
- Recommended hole diameter on glass is 25mm.
- Glass Thickness: 12mm - 15mm glass.
- Rod included.




Available Finishes


- Polished
- Brushed
- Matte Black

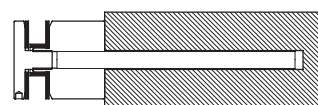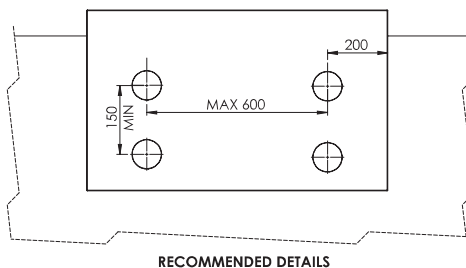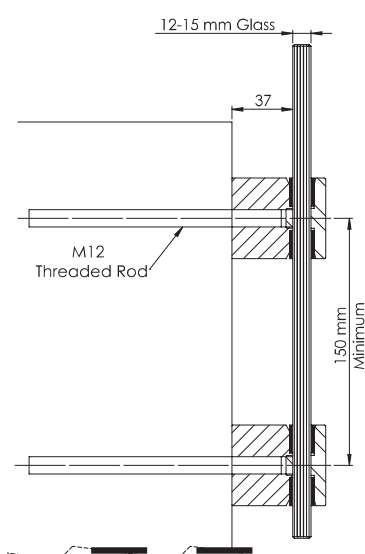

WALL MOUNTED

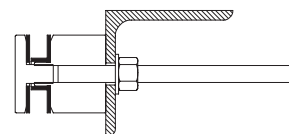



BEAM MOUNTED

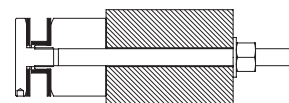

TIMBER MOUNTED

SIDE MOUNT ADJUSTABLE SLEEVE - TECHNICAL DETAIL

Code: BSR-511-44SL





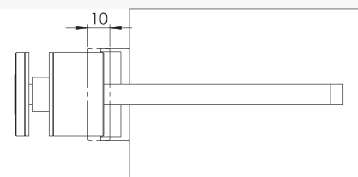



ALLEN CAP SIDE MOUNT (44Ø) - TECHNICAL DETAILS**Code : BSR-512-4435****Allen Cap side mount**

- Side Mounts can be fastened to concrete (12mm rod supplied) with chemical anchor, wood (extra fittings required) or steel beams (extra fittings required).
- As an option a sleeve can be supplied for adjustment of 7mm.
- Manufactured in 304 and 316 stainless steel.
- Recommended hole diameter on glass is 25mm.
- Glass Thickness: 12mm - 15mm glass.
- Rod included.

Available Finishes

- Polished
- Brush
- Matte Black

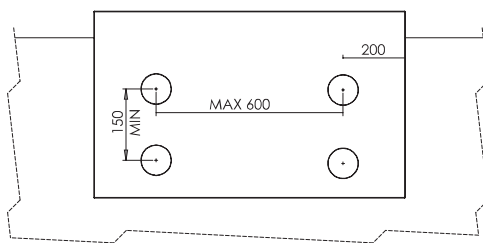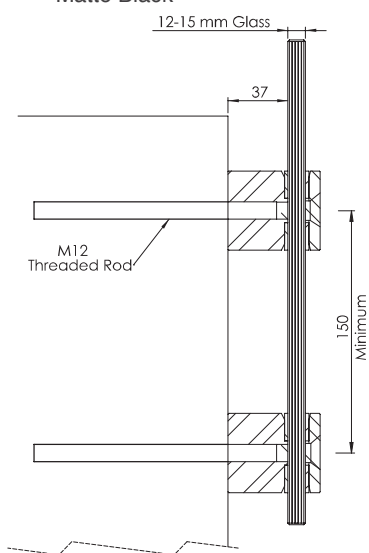
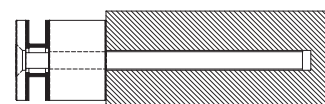
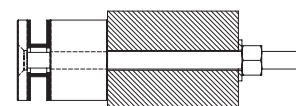
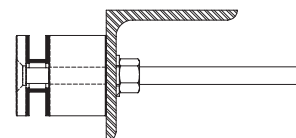
**RECOMMENDED DETAILS****WALL MOUNTED****TIMBER MOUNTED****BEAM MOUNTED****FLUSH CAP (50Ø) - TECHNICAL DETAILS****Code: BSR-511-5030**

- Side Mounts can be fastened to concrete (12mm rod supplied) with chemical anchor, wood (extra fittings required) or steel beams (extra fittings required).
- As an option a sleeve can be supplied for adjustment of 7mm.
- Manufactured in 304 and 316 stainless steel.
- Recommended hole diameter on glass is 25mm.
- Glass Thickness: 12mm - 15mm glass.
- Rod included.


Available Finishes

- Polished
- Brushed stainless steel
- Matte Black

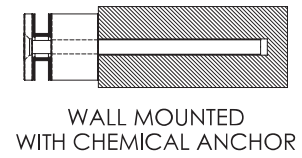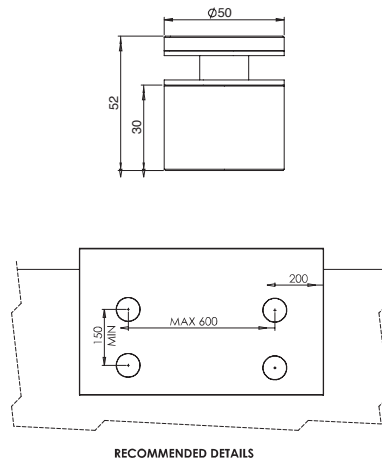
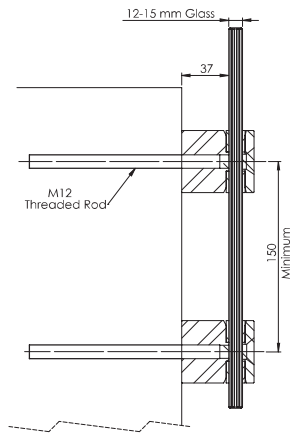



WALL MOUNTED
WITH CHEMICAL ANCHOR

TIMBER MOUNTED

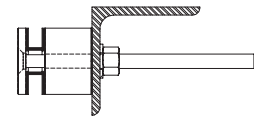





BEAM MOUNTED

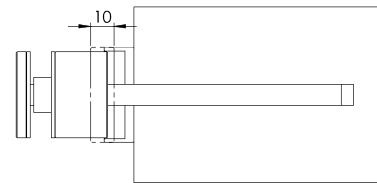SIDE MOUNT ADJUSTABLE SLEEVE - TECHNICAL DETAIL**Code: BSR-511-50SL****ALLEN CAP SIDE MOUNT (50Ø) - TECHNICAL DETAILS****Code: BSR-512-5030**


- Side Mounts can be fastened to concrete (12mm rod supplied) with chemical anchor, wood (extra fittings required) or steel beams (extra fittings required).
- As an option a sleeve can be supplied for adjustment of 7mm.
- Manufactured in 304 and 316 stainless steel.
- Recommended hole diameter on glass is 25mm.
- Glass Thickness: 12mm - 15mm glass.
- Rod included

Available Finishes

- Polished
- Brushed stainless steel
- Matte Black

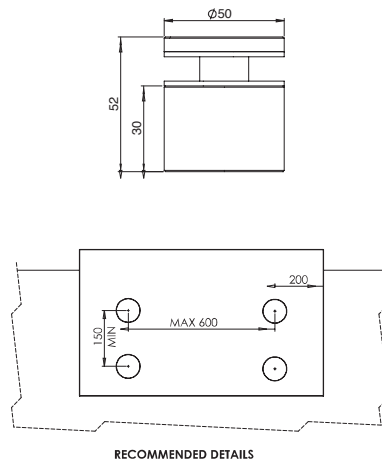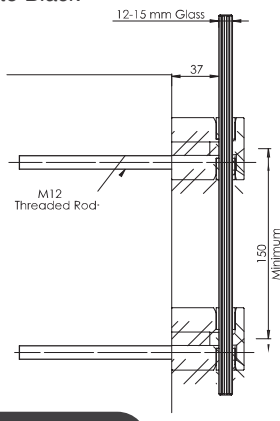WALL MOUNTED
WITH CHEMICAL ANCHOR

TIMBER MOUNTED

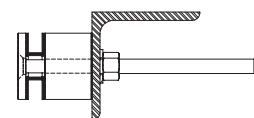

BEAM MOUNTED

HAND RAIL

42Ø ROUND SLOTTED HAND RAIL - TECHNICAL DETAILS

Code: BHR42 (42Ø Round Slotted Hand Rail)



- Rubber Gasket as well as other handrail accessories available on request.
- 6000mm and 3000mm lengths available.
- Easy install using handrail accessories, no welding required.
- Manufactured in 316 stainless steel.
- Glass Thickness: 10 - 12mm glass

Available Finishes

- Brushed stainless steel



BHR42-90	BHR42-180
	
BHR42-EC	BHR42-WF
	
BHR42-AB	
	

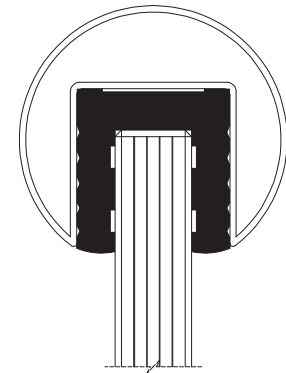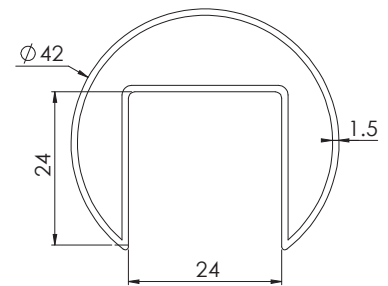

40MM SQUARE SLOTTED HAND RAIL - TECHNICAL DETAILS

Code: SHR25


- Rubber Gasket as well as other handrail accessories available on request.
- 6000mm and 3000mm lengths available.
- Easy install using handrail accessories, no welding required.
- Manufactured in 316 stainless steel.
- Glass Thickness: 10 - 12mm glass



Available Finishes

- Brushed stainless steel


SHR25-90	SHR25-180
	
SHR25-AB	SHR25-EC
	
SHR25-WF	
	

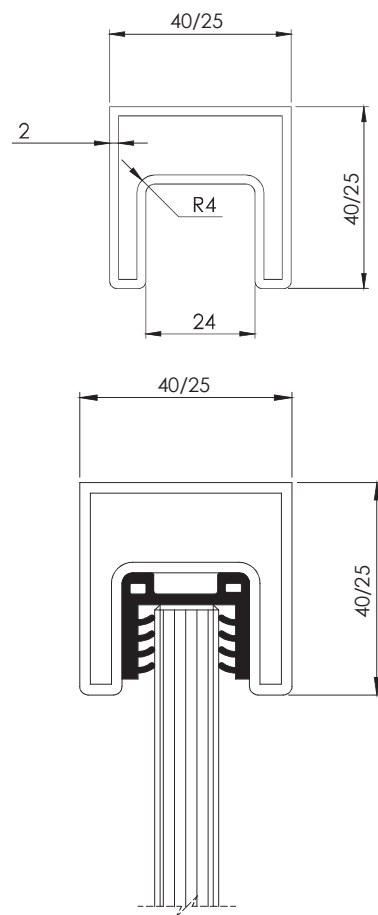

HINGES


90° WALL TO GLASS HINGE WITH SELF CLOSE FUNCTION

Code	Material	Finish	Weight	Glass Thickness
BGH-601-90	S/S 316	Bright Polished	35kg	8-12mm
BGH-611-90	S/S 316	Brushed	35kg	8-12mm
BGH-691-90	S/S 316	Matte Black	35kg	8-12mm

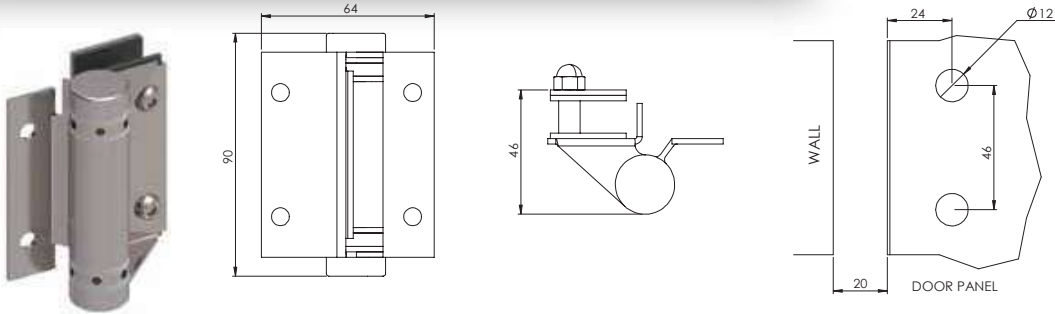

180° GLASS TO GLASS HINGE WITH SELF CLOSE FUNCTION


Code	Material	Finish	Weight	Glass Thickness
BGH-602-180	S/S 316	Bright Polished	35kg	8-12mm
BGH-612-180	S/S 316	Brushed	35kg	8-12mm
BGH-692-180	S/S 316	Matte Black	35kg	8-12mm

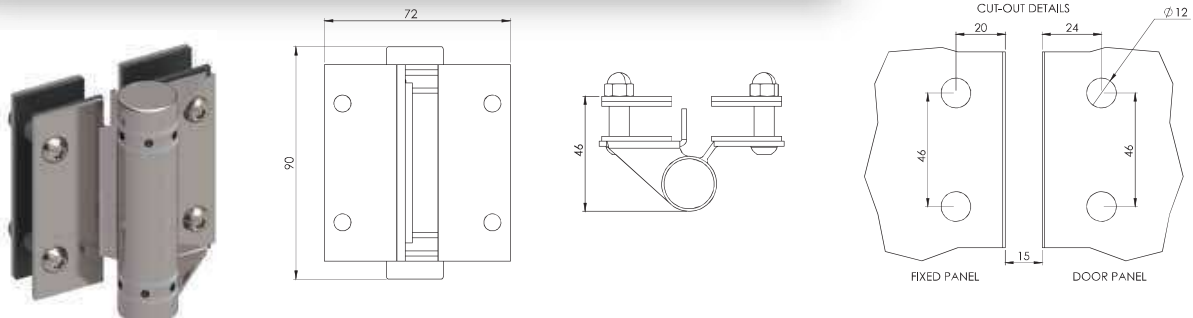

LOCKS

90° WALL TO GLASS MAGNETIC BALUSTRADE LOCK WITH KEY

Code	Material	Finish	Glass Thickness
BGL-601-90	S/S 316	Bright Polished	8-12mm
BGL-611-90	S/S 316	Brushed	8-12mm
BGL-691-90	S/S 316	Matte Black	8-12mm

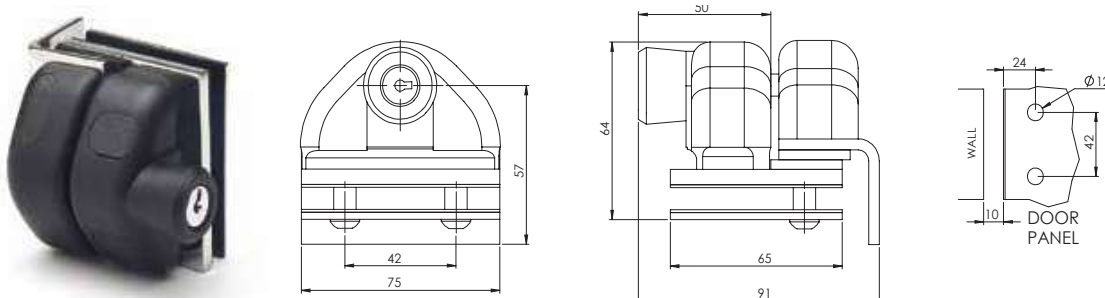

180° GLASS TO GLASS MAGNETIC BALUSTRADE LOCK WITH KEY

Code	Material	Finish	Glass Thickness
BGL-602-180	S/S 316	Bright Polished	8-12mm
BGL-612-180	S/S 316	Brushed	8-12mm
BGL-692-180	S/S 316	Matte Black	8-12mm

